


Touchstone™
Telephony Modem
Wall-Mounting Template
and Instructions

These instructions are for all of the ARRIS Touchstone Telephony Modem 40x models.

Requirements

For mounting on drywall, you need the following:

- Two .25" (6mm) drywall anchors
- Drill with .25" (6mm) bit

For mounting on plywood or studs, you need the following:

- Two 0.75" (20mm) wood screws
- Drill with .125" (3mm) bit

In either case, the screw head must be less than .36" (9mm) wide and less than .13" (3mm) thick.

Location

You can position the Telephony Modem horizontally or vertically with the mounting screws positioned horizontally or vertically. Using the supplied cables, select a location within 5 feet (1.6m) of an unswitched AC outlet.

Leave sufficient clearance between the bottom of the Telephony Modem, and any flooring or shelving underneath, to allow access to cabling. In addition, leave enough slack in all cables so that the Telephony Modem can be removed for maintenance without disconnecting cables. There must also be enough room on the side of the Telephony Modem to allow for battery replacement.

Mounting Instructions

- 1** Select mounting orientation and location; horizontal or vertical and within 5 feet (1.6m) of the computer.
- 2** Position the mounting template on the surface where you intend to mount the Telephony Modem and secure in place with transparent tape.
- 3** Drill holes through the template in the specified locations in accordance with requirements for the selected mounting surface. After drilling holes, remove the template from the surface.
- 4** If using drywall anchors, set them into the wall. Then, drive the screws into the wall leaving a gap of about .125" (3 mm) between the screw head and the wall. If not using anchors, just drive the screws.
- 5** Lift the Telephony Modem into position. Slip the large end of the mounting slots (in the back of the Telephony Modem) over the screws, then slide the case vertically or horizontally into the narrow end of the mounting slot.

Touchstone™ Telephony Modem **Wall-Mounting Template and Instructions**

© 2003-2005 ARRIS. All rights reserved.


All information contained in this document is subject to change without notice. ARRIS reserves the right to make changes to equipment design or program components, as progress in engineering, manufacturing methods, or other circumstances may warrant.

Touchstone is a trademark of ARRIS International, Inc. All other trademarks are the property of their respective holders.

Document number: ARSVD00736
Release 4 Standard 4.0
March 2005

Horizontal Mount Top

Vertical Mount Top

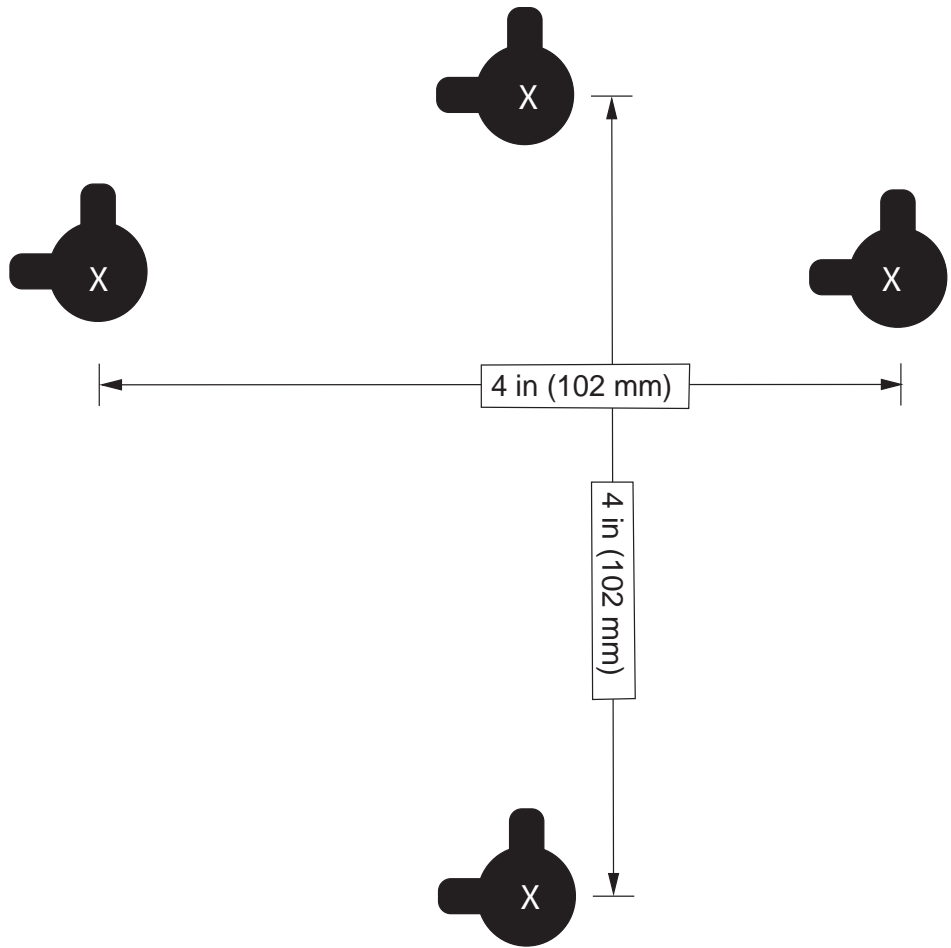

Cable Exit