



Touchstone® DOCSIS® 3.0 Residential Gateway

With 802.11n, 4 Port
Router, and 2 Voice
Lines - TG852



Configuration

- 8x4 Channel Bonding
- Multi Processor Technology for Highest Performance
- DOCSIS® 3.0 and PacketCable™ 1.1/1.5 compliant design
- Upgradable to PacketCable 2.0
- Integrated 4 port Gigabit Ethernet Wireless Router
- 2x3 Integrated 2.4GHz 802.11n radio with Beam Forming
- USB 2.0 Host Port
- Designed for CableLabs® WiFi Federation Compliancy
- Integrated Firewall, Parental Control, DHCP and more
- Up to two lines of carrier-grade VoIP
- Multiple Protocol Support: PacketCable (NCS) and Session Initiation Protocol (SIP)
- Internal Power Supply for Highest Reliability

Advanced Residential Gateway Solution for Voice, Data , and Wireless

The Touchstone® DOCSIS® 3.0 Residential Gateway is an 8x4 advanced gateway product. The TG852 combines two analog voice lines, a 4-port Gigabit Router, and a 802.11n wireless access point into a single device capable of supporting both home and small office applications. Using multi-processor technology, the TG852 can achieve high bandwidth performance without affecting voice quality, a historical ARRIS product standard. This feature packed unit will lead the future for advanced home and small office services.

Enhanced Performance

Operators strive to push the limits on DOCSIS 3.0 performance delivered to the customer with both the Ethernet and the wireless interfaces. The 802.11n wireless interface can deliver the performance desired while also offering improvements in home coverage above those of previous technologies.

Efficient and Flexible Maintenance


The TG852 distinguishes itself with capabilities that minimize an operators support needs. Multiple provisioning methods (SNMP, Configuration File, Remote WebGUI access, and TFTP) allow a custom designed setup to be efficiently applied to the end user. Multiple local and remote access levels (User , Admin) also allow more ease and flexibility for manual configuration and control.

Energy Management and Conservation for Cost Savings

To lower the operational costs, ARRIS advanced battery technology allows for use of the smallest battery size in the industry for reaching 8 hours of standby support. This technology will also realize significant cost savings to the end consumer in energy consumption over the life of the product.

Touchstone® DOCSIS® 3.0 Residential Gateway With 802.11n, 4 Port Router, and 2 Voice Lines

- DOCSIS® 3.0 compliant designs
- Up to 8 downstream and 4 upstream channel bonding
- Tuners support two 48MHz blocks each consisting of up to 4 bonded channels
- High performance WiFi-Alliance certified 802.11b/g/n wireless access point
- Internal 2x3 MIMO antenna configuration for optimal throughput and coverage
- Supports 802.11n Beam Forming
- Designed for CableLabs® Wifi Federation Hardware Compliance
- High Speed Internet via 4 ports 10/100/1000Base-T Ethernet (RJ-45)
- Multiple (8) SSID Support with individual rate limiting
- WPA™ and WPA2™ Personal and Enterprise, 64/ 128 bit WEP, and MAC authentication wireless security options
- Support for WMM® QOS, and WMM Power Save
- Wi-Fi Protected Setup™ (facilitates easy set-up of security using a Personal Identification Number (PIN) and/or a button located on the Wi-Fi device)
- Software support for UPnP
- Support for a single USB 2.0 Targeted Embedded Host port
- High Speed Internet via 4 ports 10/100/1000Base-T Ethernet (RJ
- All ports Auto-negotiation, auto speed sensing and Auto MDI/X
- Capable of bridging Ethernet traffic including between USB
- USB 2.0 powered Host Port
- Support for Static and Dynamic IP, DHCP, NAT, L2TP, VLAN's and RIPv2
- Integrated Universal Power Supply for Higher Reliability
- 2 lines of Carrier Grade Voice
- Multiple Protocol Support: PacketCable (NCS) and Session Initiation Protocol (SIP)
- Toll grade, compression, and High Fidelity Wideband CODECs supported.
- Battery Backup options allow over 8 hours of standby support

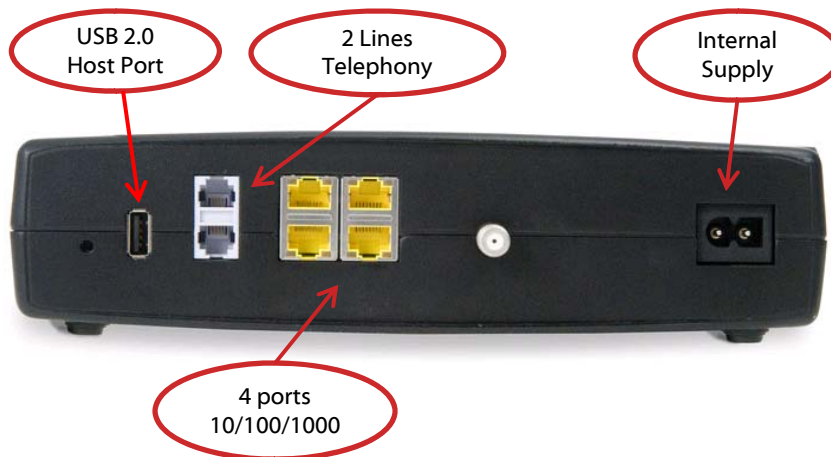

The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice. ARRIS, the ARRIS logo, Auspice®, C3™, C4®, C4c™, Cadant®, C-COR®, CHP Max5000®, ConvergeMedia™, Cornerstone®, CORWave™, CXM™, DS®, Digicon®, ENCORE®, Flex Max®, HEMJ®, Keystone™, MONARCH®, MOXI®, n5®, nABLE®, nVision®, OpsLogic®, OpsLogic® Service Visibility Portal™, PLEXIS®, PowerSense™, QUARTET®, Regal®, ServAssure™, Service Visibility Portal™, TeleWire Supply®, TLX®, Touchstone®, VIPr™, VSM™, and WorkAssure™ are all trademarks of ARRIS Group, Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. © Copyright 2011 ARRIS Group, Inc. All rights reserved. Reproduction in any manner whatsoever without the express written permission of ARRIS Group, Inc. is strictly forbidden. For more information, contact ARRIS.



www.arrisi.com